




RB-114



### DIMENSIONS

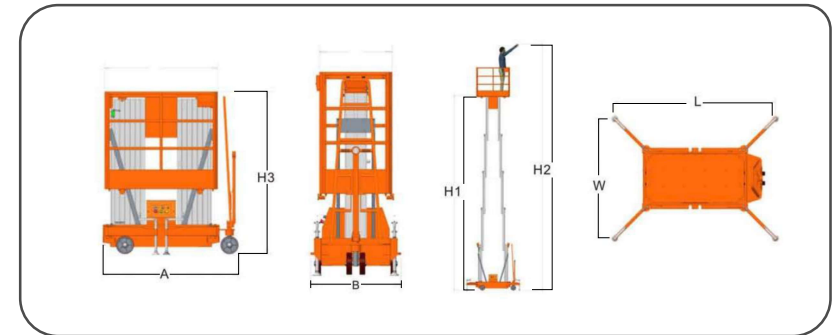

### Double Mast AWP



### Standard equipment

- Leveling outrigger device
- Two controller operation
- Emergency stop button
- Emergency lowering system
- Overloading limit
- Battery charge indicator and Limit switch
- Leveling instrument

*\*On Demand Custom Specifications are Available\**

*\*AC-110/220/440V and DC-12/24V Available\**

### TECHNICAL SPECIFICATIONS

MODEL	RB-114 (Double Mast)					RB-114 (Multi Mast)			
Max Platform Height (H1)	mm	8000	10000	12000	14000	16000	18000	20000	22000
Max Working Height (H2)	mm	9700	11700	13700	15700	17700	19700	21700	23700
Loading Capacity	kg	200-300	200-300	200	200	200-250	200	200	150
Platform Size	mm	1160x600	1320x600	1420x600	1420x600	1600x800	1600x800	1600x800	1600x800
Power Required	V/hz/F	AC220/50HZ	AC220/50HZ	AC220/50HZ	AC220/50HZ	AC220/50HZ	AC220/50HZ	AC220/50HZ	AC220/50HZ
Motor Rating	v/kw	1.1	1.1	1.1	1.1	2.2	2.2	2.2	2.2
Equipment Weight	kg	470	540	640	750	1500	2200	2350	2500
Overall Length (A)	mm	1360	1500	1660	1660	2200	3900	3900	4300
Overall Width (B)	mm	850	900	970	1100	1250	2400	1450	1450
Overall Height (H3)	mm	1980	2040	1980	2380	2450	2300	2300	2400
Outrigger Footprint (LxW)	mm	1650x1660	2130x1890	2130x1940	2130x1940	2890x2100	2890x2100	2890x2100	2890x2100