




SIZE SPECIFICATIONS

Model	H	A	B	D	E	W	U	R	T
RB-120	635	460	230	288	165	926	560	142	231
	650	520	260	300	176	926	560	142	231
	660	460	230	288	165	1106	740	142	231
	770	615	295	430	265	1280	930	142	231
	770	615	295	430	265	1280	930	142	231
	815	520	260	300	236	1280	930	142	231
	830	615	295	430	265	1280	930	142	231
	830	615	295	430	265	1280	930	142	231
	930	615	295	430	320	1280	930	142	231
	940	520	260	350	205	1280	930	142	231
	1015	615	295	430	325	1280	930	142	231
	1200	615	295	505	320	1280	930	142	231
	1190	630	315	890	445	1280	930	142	231
	1310	630	315	1070	535	1280	930	142	231
	1470	630	315	1260	630	1280	930	142	231
	1470	630	315	1460	725	1280	930	142	231

DIMENSIONS

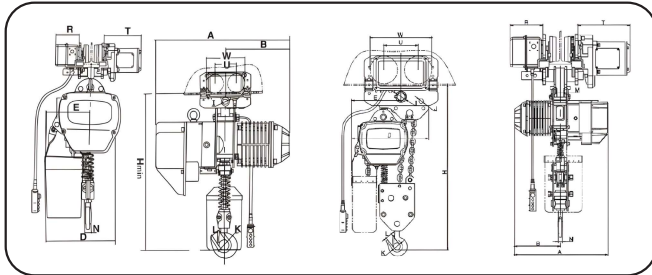

CHAIN HOIST

- Shell
- Inverse Phase Sequence Protecting Device
- Limit Switch
- 24V/36V Device
- Side Magnetic Braking Device
- Chain Bag

TECHNICAL SPECIFICATIONS

RB-120															
Model	Lifting Weight (t)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor					Operating Motor					I-Steel Track (mm)	
				Power (kw)	Rotation Speed (r/min)	Phases	Voltage (v)	Frequency (Hz/s)	Power (Kw)	Rotation Speed (r/min)	Operating Speed (m/min)	Phases	Voltage (v)		Frequency (Hz/s)
5	3/9	7.2	1.1	1440	3	380	50	0.4	1440	11/21	3	380	50	85-125	
1	3/9	6.8	1.5	1440	3	380	50	0.4	1440	11/21	3	380	50	68-153	
1	3/9	3.6	1.1	1440	3	380	50	0.4	1440	11/21	3	380	50	68-153	
1.5	3/9	8.8	3.0	1440	3	380	50	0.4	1440	11/21	3	380	50	82-178	
2	3/9	6.6	3.0	1440	3	380	50	0.4	1440	11/21	3	380	50	82-178	
2	3/9	3.4	1.5	1440	3	380	50	0.4	1440	11/21	3	380	50	82-178	
2.5	3/9	5.6	3.0	1440	3	380	50	0.75	1440	11/21	3	380	50	100-178	
3	3/9	5.6	3.0	1440	3	380	50	0.75	1440	11/21	3	380	50	100-178	
3	3/9	4.4	3.0	1440	3	380	50	0.75	1440	11/21	3	380	50	100-178	
3	3/9	2.2	1.0	1440	3	380	50	0.75	1440	11/21	3	380	50	100-178	
5	3/9	2.8	3.0	1440	3	380	50	0.75	1440	11/21	3	380	50	112-178	
7.5	3/9	1.8	3.0	1440	3	380	50	0.75	1440	11/21	3	380	50	112-178	
10	3/9	2.8	3.0x2	1440	3	380	50	0.75	1440	11/21	3	380	50	150-220	
15	3/9	1.8	3.0x2	1440	3	380	50	0.75x2	1440	11/21	3	380	50	150-220	
20	3/9	1.4	3.0x2	1440	3	380	50	0.75x2	1440	11/21	3	380	50	150-220	
25	3/9	1.1	3.0x2	1440	3	380	50	0.75x2	1440	11/21	3	380	50	150-220	

On Demand Custom Specifications are Available

RB-120

