



**RB INDUSTRIAL
EQUIPMENTS**


RB-131

Self Propelled Scissor Table RB-131

EXTENDIBLE PLATFORM



ELECTRIC CONTROL HANDLE

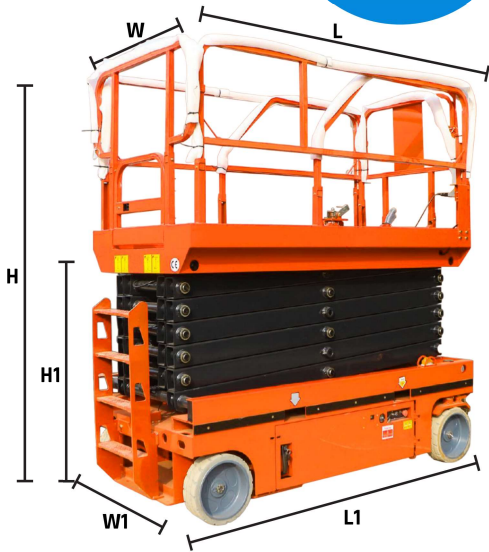

- Forward & Backward Motion - Fully Electric
- Up and Down - Fully Electric
- Easy To Use
- Low Maintenance

On Demand Custom Specifications are Available

TECHNICAL SPECIFICATIONS

Model	RB 131						
Maximum working height	mm	5000	5900	8000	10000	12000	13800
Maximum Platform height (H2)	mm	3000	3900	6000	8000	10000	11800
Folding maximum height (quadrail unfolding) (H)	mm	1830	1930	2150	2275	2400	2525
Folding maximum height (quadrail removed) (H1)	mm	1370	1470	1690	1815	1940	2035
Whole length (L1)	mm	1180	1180	2400	2400	2400	2400
Whole width (W1)	mm	760	760	1150	1150	1150	1150
Platform size (LXW)	mm	1170x600	1170x600	2270x1150	2270x1150	2270x1150	2270x1150
Platform extend size	mm	900	900	900	900	900	900
Minimum ground clearance (folding)	mm	60	60	110	110	110	110
Minimum ground clearance (rising)	mm	60	60	20	20	20	20
Wheelbase	mm	990	990	1850	1850	1850	1850
Minimum turn radius (inner wheel)	mm	1200	1200	0	0	0	0
Minimum turn radius (outer wheel)	mm	1200	1200	2100	2100	2100	2100
Power source	v/Kw	24/0.8	24/0.8	24/4	24/4	24/4	24/4
Running speed (folding)	Km/h	4	4	3.5	3.5	3.5	3.5
Running speed (rising)	Km/h	0.8	0.8	0.8	0.8	0.8	0.8
Rising / falling speed	sec	20/30	20/30	40/50	40/50	70/80	70/80
Lifting Motor		24/0.8	24/0.8				
Battery	V/Ah	2x12/80	2x12/80	24/200	24/200	24/200	24/200
Charger	V/A	24-10	24-10	24/30	24/30	24/30	24/30
Maximum Climbing ability	%	10-15	10-15	20	20	20	20
Maximum working allowable angle	/	2*	2*	2-3*	2-3*	2-3*	2-3*
Way of control	/	Electro-Hydraulic Proportion Control					
Driver	/	Double Front Wheel					
Hydraulic drive	/	Double Rear Wheel					
Wheel size (stuffed & no mark) (Rear)	mm	230x80	230x80	381x127	381x127	381x127	381x127
Driving Wheel (Front)	mm	150x60	150x60	381x127	381x127	381x127	381x127
Lifting capacity	kg	300/500	300/500	300/500	300/500	300/500	300/500
Lifting extend capacity	kg	113	113	113	113	113	113
Overall Net Weight	kg	490	600	1900	2080	2490	2490